


RCS6COAX-IP Network Ceiling Speaker

VOIP | SIP | POE | IP | Networks

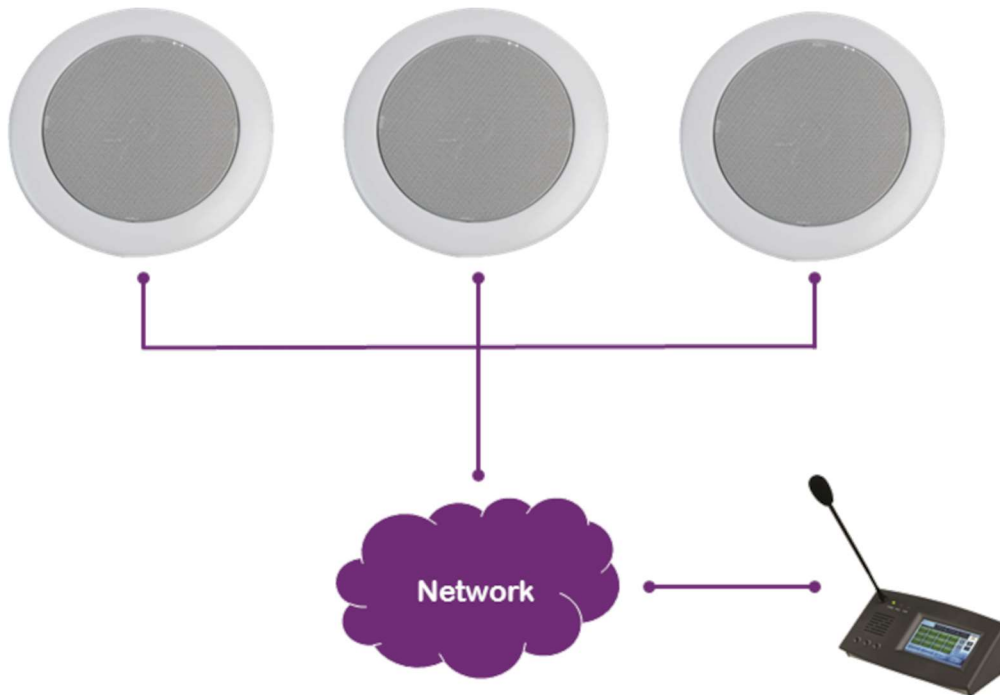

Main Features

- Use for high quality background music and speech
- Rated power: 10W
- Driver impedance: 8Ω
- Material: Steel
- Mounting: Torsion Springs
- Supports PoE+ and PoE power
- Standard RJ45 interface, PCB control and Class-D amp board (2 X 20w)
- Cost effective and simple installation with single cable deployment
- Easily configured, controlled, managed, and monitored via web browser
- Full DSP includes Ducker, AGC, PEQ, Hi/Low Pass, Compressor, Limiter, etc.
- IP based for music streaming, routing, paging and control over LAN/WAN
- VoIP call via SIP protocol
- Supports audio codecs G.711u, G.711a, G.722, PCM16K and MP3
- 3 control inputs, 1 contact output
- Internal storage (200mb) plus microSD card of up to 512GB available for message or music storage