
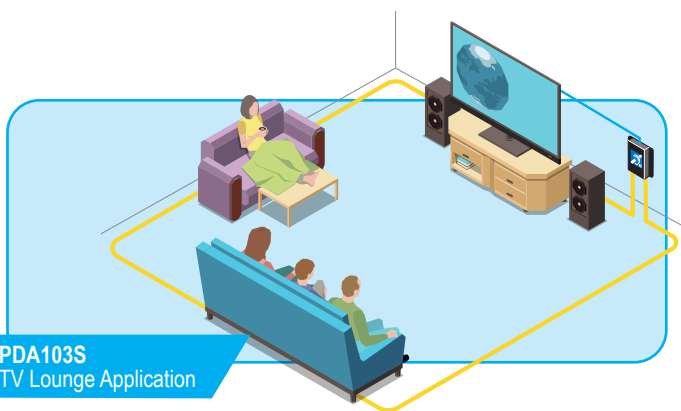


# PDA103L/R/S

## 50m<sup>2</sup> Small Room Hearing Loop Systems

### Key Features

- ▶ Three wall-mountable hearing loop kits for use in rooms up to 7m x 7m (in areas over 5m wide with high metal content consider using a phased array loop system instead, see pages 18 & 19).
- ▶ PDA103R & L ideal for meeting rooms. PDA103S ideal for TV lounges. See kit contents below.
- ▶ Amplifier includes a 3.5mm mic input, line level input & 'outreach' socket (PDA103S also has a digital TOS link connector for TV set connection)
- ▶ Adjustable mic, line level, metal compensation and 'outreach' controls.
- ▶ Drive control allows the output stage to be set up to suit the characteristics of the application.
- ▶ State-of-the-art audio processor with automatic gain control
- ▶ Limit, Peak, Loop Fault and Power On indicators,
- ▶ Exceeds the requirements of PD IEC TR 63079 & EN60118-4 when correctly installed.

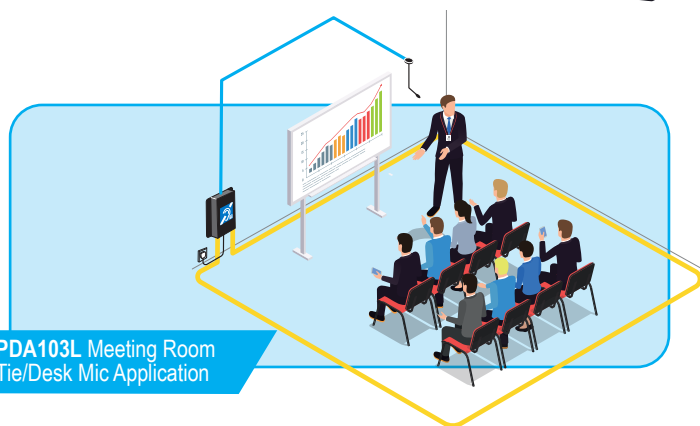

### At-a-glance specifications

<b>TYPE</b>	Perimeter (A3). Free-standing/wall mountable. Plugtop mains lead supplied
<b>COVERAGE</b>	1.2m <sup>2</sup> approx.
<b>DIMENSIONS &amp; WEIGHT</b>	W 136 x H 56 x D 178mm / 1.25Kg (amplifier). W x 340 x H 250 x D 73mm (Kit Box).
<b>CONSTRUCTION &amp; FINISH</b>	Black metal, IP40.
<b>INPUTS</b>	1 x 3.5mm remote mic. socket; 1 x 3.5mm line socket; 1 x Outreach socket
<b>INDICATORS</b>	Limit, Peak, Loop Fault and Power On
<b>CONTROLS</b>	Mic; Line; Outreach; Metal Compensation (all individually adjustable) and Loop Drive (Level)
<b>KIT VARIANTS</b>	PDA103L Small Room tie/desk mic. kit: PDA103 amp; AMT mic; 40m loop cable; 'AFILS fitted' sticker PDA103R Small Room plated mic. kit: PDA103 amp; APM mic; 40m loop cable; 'AFILS fitted' sticker PDA103S TV lounge kit: PDA103 amp; APL dual phono outreach plate, 40m loop cable; 'AFILS fitted' sticker.