

STANDARD MICROPHONE UNIT LONG MICROPHONE UNIT


TS-923 TS-924

Thank you for purchasing TOA's Standard microphone unit or Long microphone unit.
Please carefully follow the instructions in this manual to ensure long, trouble-free use of your equipment.

1. GENERAL DESCRIPTION

TOA's TS-923 and TS-924 Microphones are dedicated components of the Infrared Conference System's Chairman Unit and Delegate Unit. Their mic heads are equipped with illuminated display rings that allow the status of the units in use to be monitored at a glance. Their goosenecks have two flexible parts, making it possible to adjust the microphones to an optimal position for the user.

2. INSTALLATION

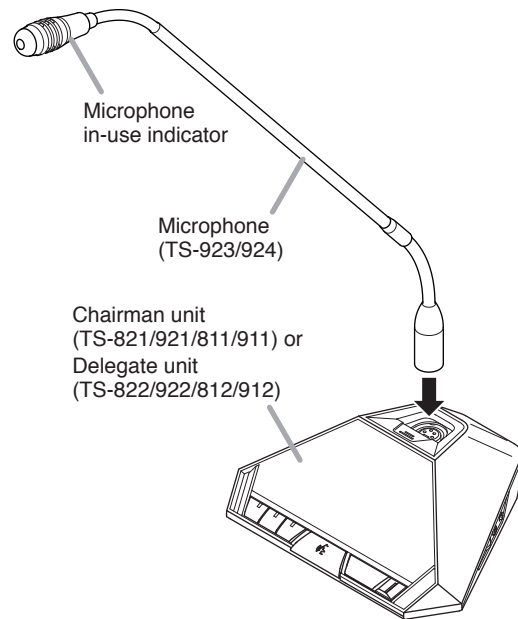

3. SPECIFICATIONS

Model No.	TS-923	TS-924
Type	Electret condenser microphone	
Directivity	Unidirectional	
Rated Impedance	1.4 kΩ	
Rated Sensitivity	-37 dB (1 kHz, 0 dB = 1 V/Pa)	
LED Indicator	Speech indicator (ring type) Red	
Frequency Response	100 Hz – 13 kHz	
Output Connector	Combined type of XLR-4-32	
Flexible Part	2 parts	
Operating Temperature	0 °C to 40 °C (32 °F to 104 °F)	
Operating Humidity	90 %RH or less (no condensation)	
Finish	Body: Aluminum, black, semi-gloss, paint Shaft: Copper alloy, black, semi-gloss, paint	
Length	470 mm (1.54 ft)	620 mm (2.03 ft)
Weight	130 g (0.29 lb)	150 g (0.33 lb)
Applicable Unit (option)	Chairman unit: TS-821, TS-921, TS-811, TS-911 Delegate unit: TS-822, TS-922, TS-812, TS-912	

Note: The design and specifications are subject to change without notice for improvement.

Traceability Information for Europe

Manufacturer:
TOA Corporation
7-2-1, Minatojima-Nakamachi, Chuo-ku, Kobe, Hyogo, Japan

Authorized representative:
TOA Electronics Europe GmbH
Suederstrasse 282, 20537 Hamburg, Germany